



## Glass fibre veils V1 & V2

**V1: Glass fibre veil, yellow 35g/m<sup>2</sup>, reinforced**

**V2: Glass fibre veil, black 60g/m<sup>2</sup>**

Facing for mineral wool products



### Noise control

Excellent absorption properties when combined with mineral wool substrate




### Aesthetics

Used for aesthetics purposes mainly and to prevent the dispersion of the fibres




### Easy handling

Rolls in handable delivery form that can be carried by one person (< 20 kg)



### Marine approval

Certified for marine applications  
Low Flame Spread according to IMO rules

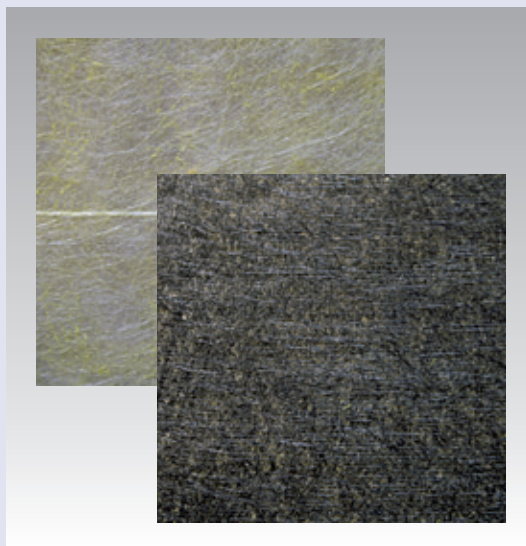

# Glass fibre veils V1 & V2



**V1: Glass fibre veil, yellow 35g/m<sup>2</sup>, reinforced**

**V2: Glass fibre veil, black 60g/m<sup>2</sup>**

Characteristic	Symbol	Unit	Quantities and measured values	Standard
Application fields	-	-	Facing for mineral wool products	-
Material	-	-	Continuous filament glass fibres are not classified under the European Regulation (EC) No1272/2008 on classification, labelling and packaging of substances and mixtures	-
Fibre diameter	-	[µm]	V1: 13 (mean value) V2: 10 (mean value)	-
Gramweight	-	[g/m <sup>2</sup> ]	V1: 35 V2: 60	DIN EN 12127
Color	-	-	V1: Yellow V2: Black	-
Fire reaction	-	-	Surface material with low flame-spread characteristics	IMO Resolution MSC,307(88), FTP Code 2010, Annex 1, Part 5
Tensile strength	-	[N/50 mm]	V1: lengthwise min. 45 / Crossways min. 40 V2: lengthwise min. 170 / Crossways min. 130	DIN 29073

Delivery form: Standard dimensions / packaging information*				
	Length (m)	Width (mm)	Diameter (m)	Weight per roll (kg)
V1 - yellow glass veil	300	1.30	0.40	19.7
V2 - black glass veil	250	1.30	0.39	25.5
	200	1.30	0.36	21.6
	50	1.20	0.23	9.6

\* Dimensions on request, products with minimum order quantities are requested

[www.isover-technical-insulation.com](http://www.isover-technical-insulation.com)

The technical information corresponds to our present state of knowledge and experience at the date of printing (see imprint). But no legal guarantee can be given, unless it has been explicitly agreed. The state of experience and knowledge is developing continuously. Please see to it that you always use the latest edition of this information. The described product applications do not take special circumstances in consideration. Please verify whether our products are appropriate for the concrete application. For further information please contact our Isover sales offices. We deliver only according to our terms of trade and terms of delivery.

SAINT-GOBAIN ISOVER · "Les Miroirs" · 18, avenue d'Alsace · 92400 Courbevoie · France

**ISOVER**  
SAINT-GOBAIN